
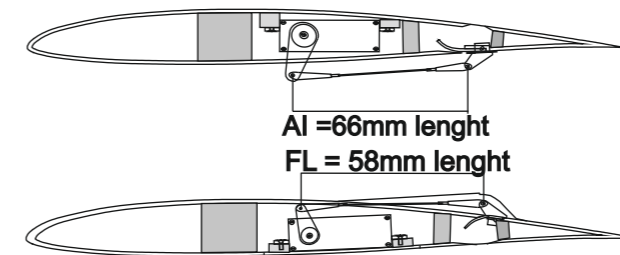

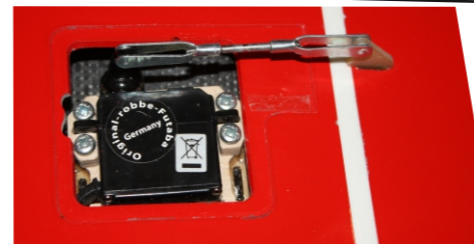


Servos Ailerons 40Ncm power metal gears


Servos flaps 45Ncm power metal gears

Flight phase F 3B

Control surface (+ : down, - : Up)	
Center of gravity	91mm- 101mm
start.hook in front of Cg	4-6 mm
Ailerons:	+5mm -10mm
Flaps max :	-3mm + 49mm
Rudder :	22mm
Elevator : +	+7mm -7mm
Elevator : V	+6mm -6mm
FL-AI-Mix : Start	+4mm +2mm
FL-AI-Mix : Flight	+2mm +1mm
FL-AI-Mix : Route	-1mm 0mm
FL-AI-Mix : speed	-2mm 0mm
Butterfly / brake : FL-AI-	+48mm -14mm
HLW compensation	-2 -4mm

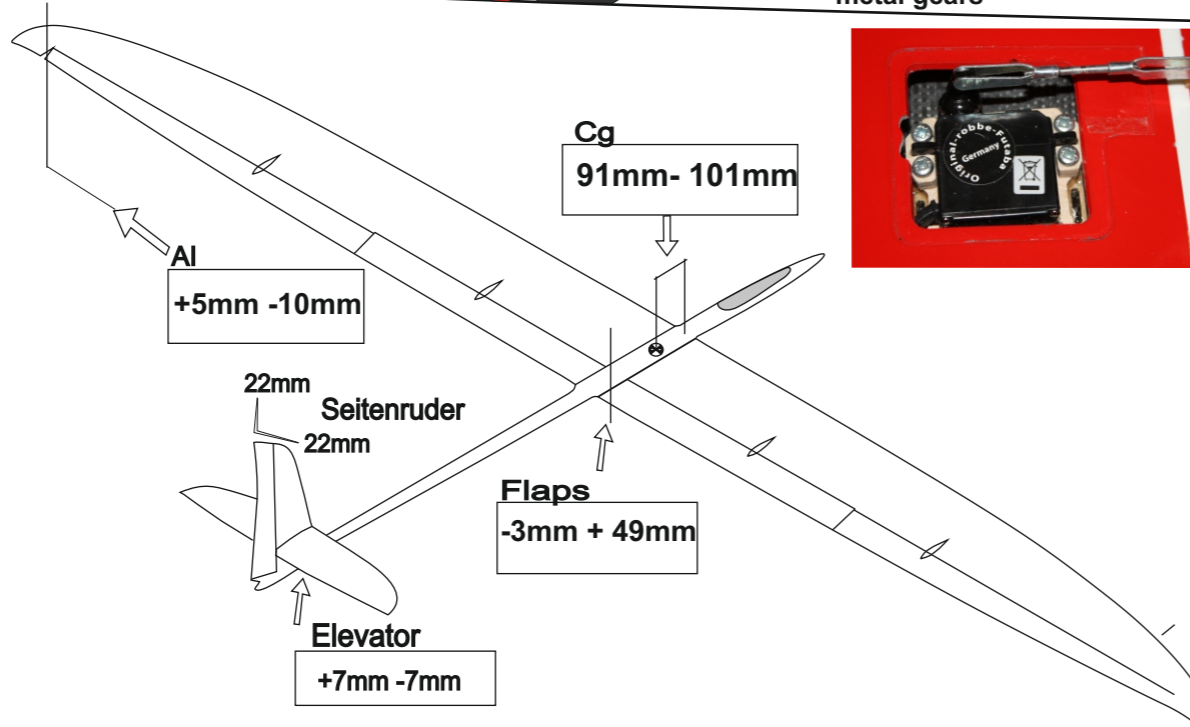

Servos Rudder 30Ncm power
Servos Elevator 40Ncm power

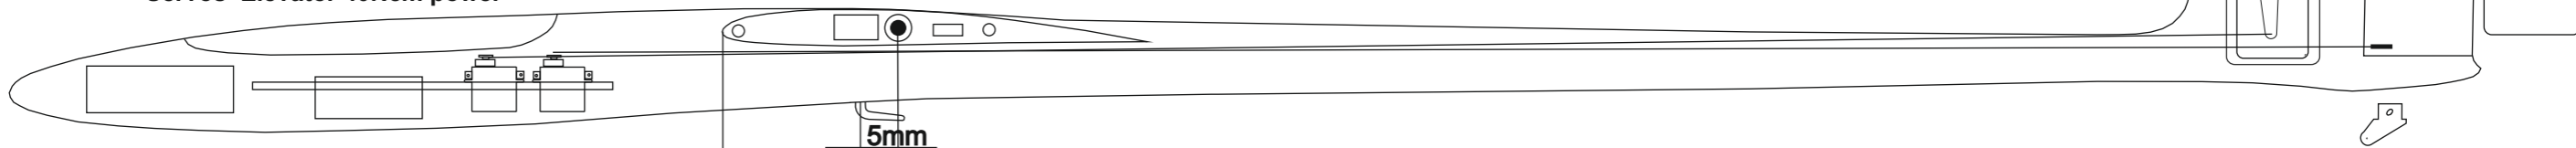

Cg =F3F 101mm EWD = 0,6°
F3B 91mm EWD = 0,8°

Elektric installed fuselage

